


Specification FX10,000SS Oil/ Water Separator

SPECIFICATIONS

Material -
 Tank 2.5mm 304 stainless steel
 Lid 1.2mm 304 stainless steel
 Stand 50mm (3mm wall) SHS stainless steel


Maximum flow rate 10,000 litres per hour
 Actual flow rate As per Pump Specs
 Pump type As Specified
 Separation process Enhanced gravity
 Coalescing medium Vertical tube pack
 Weight (empty) 340kg
 Weight (full) 2240kg
 Volume 1900 litres net
 Inlet 2 x 80mm BSP Female
 Outlet 2 x 100mm BSP Female
 Gate Valve 4 x 40mm BSP Male

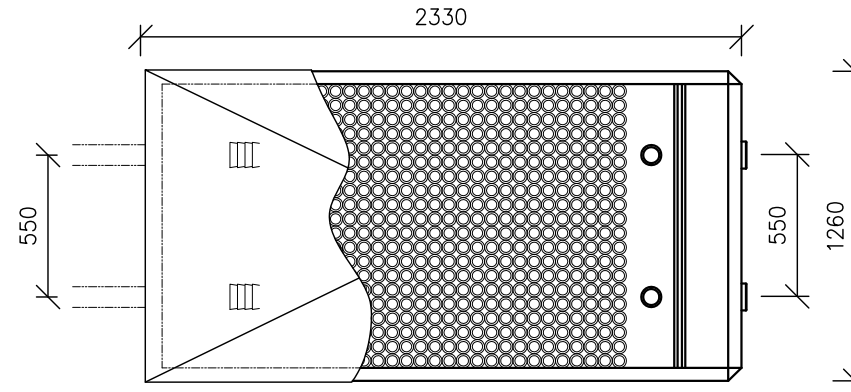

Note:
 For marine applications Separator can be supplied in 316 or 445m Grade Stainless Steel.

VTC Filter pack Specification

Tube 55 mm Dia.
 Block Size x 6 550x550x550mm
 Volume 0.9 m³
 Surface Area 180 m²

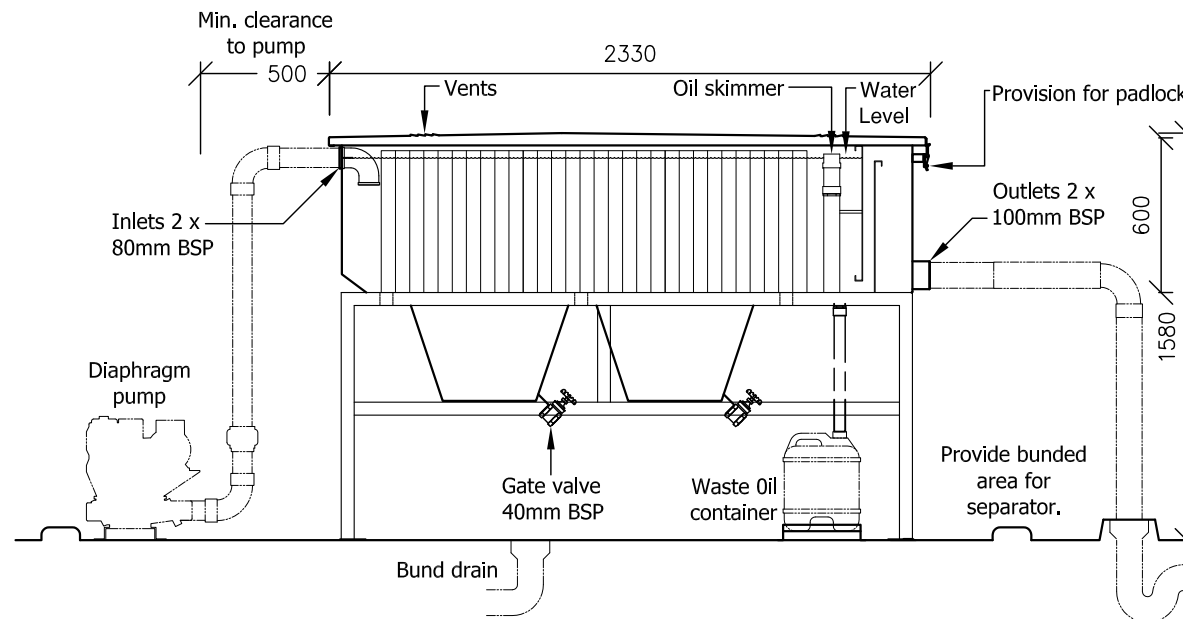

This is a schematic representation only. Slab size and gradient to engineers details as arranged by customer. All plumbing and electrical connections to be installed by certified tradesmen in accordance with relative authorities requirements. Tradesmen to be engaged by the purchaser. System to be approved by relative Local Authorities before Installation.

This Drawing and design is the Property of Fox Environmental Systems Pty Ltd. It must not be used for any other purpose than that for which it was issued.

Project
 Fox FX10,000SS Specifications

Drawing Title
 FX10,000SS Oil/ Water Separator

Drawn by:	JFS
Date:	19/05/2016
Scale:	1:20
Drawing No:	A4-SPEC-1025-1