

Specification FX20,000SS Oil/ Water Separator

SPECIFICATIONS



Material - Tank 2.5mm 304 stainless steel
 Lid 1.6mm 304 stainless steel
 Stand 50mm SHS stainless steel

Maximum flow rate 20,000 litres per hour
 Suggested flow Rate up to 15,000 lph
 Separation process Enhanced gravity
 Coalescing medium Vertical tube pack
 Weight (empty) 590 Weight (full) 3630kg
 Volume 3040 litres net
 Inlet 2 x 80mm BSP Female
 Outlet 2 x 100mm BSP Female
 Gate Valve 4 x 50mm BSP Male

Note:
 For marine applications Separator
 can be supplied in 316 Grade
 Stainless Steel.

VTC Filter pack Specification

Tube 55 mm Dia.
 Block Size x 12 550x550x550mm
 Volume 1.8 m³
 Surface Area 360 m²

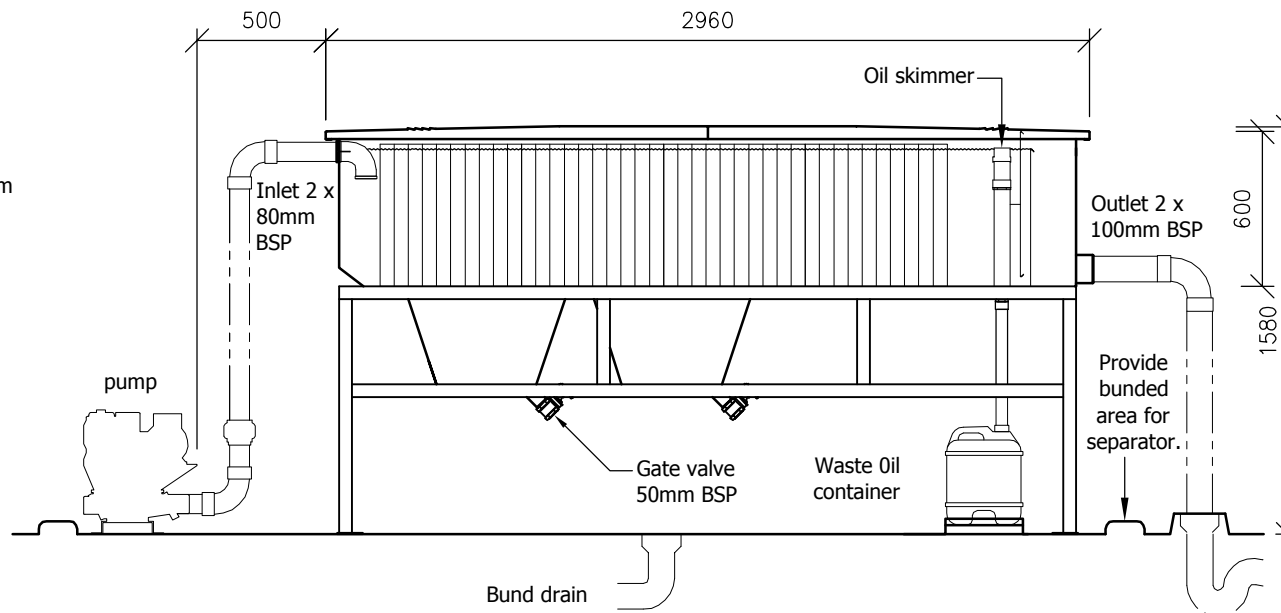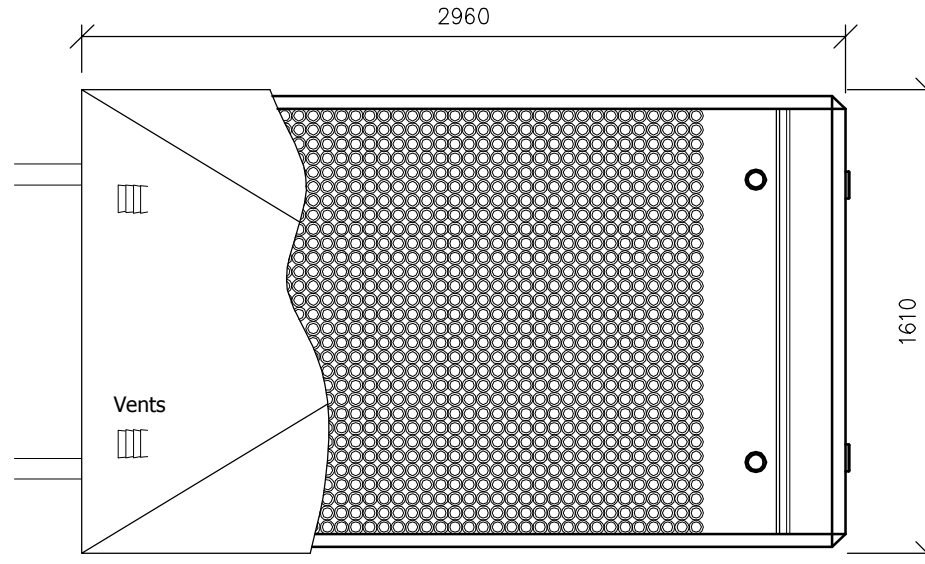

This is a schematic representation only. Slab size and gradient to engineers details as arranged by customer. All plumbing and electrical connections to be installed by certified tradesmen in accordance with relative authorities requirements. Tradesmen to be engaged by the purchaser. System to be approved by relative Local Authorities before Installation.

This Drawing and design is the Property of Fox Environmental Systems Pty Ltd. It must not be used for any other purpose than that for which it was issued.

Project
 Fox FX20,000SS Specifications

Drawing Title
 FX20,000SS Oil/ Water Separator

Drawn by:	JFS
Date:	01/11/2010
Scale:	1:20
Drawing No:	A4-SPEC-1027