


FX30,000SS OIL/WATER SEPARATOR SPECIFICATION


SPECIFICATIONS

MATERIAL	TANK:	2.5mm 304 OR 316 SS
	LIDS:	1.6mm 304 OR 316 SS - 6 PIECE
STAND:		50 x 3 SHS SS
MAX FLOW RATE:		30,000 L/h
SUGGESTED FLOW RATE:		25,000 L/h
SEPARATION PROCESS:		ENHANCED GRAVITY
COALESCING MEDIUM:		VERTICAL TUBE PACK
MASS (EMPTY):		740kg
MASS (FULL):		4090kg
VOLUME:		3350L
INLETS:		2x 80mm TABLE E FLANGES
OUTLETS:		2x 100mm TABLE E FLANGES
GATE VALVES:		4x 80mm
OIL SKIMMERS:		2x 50mm

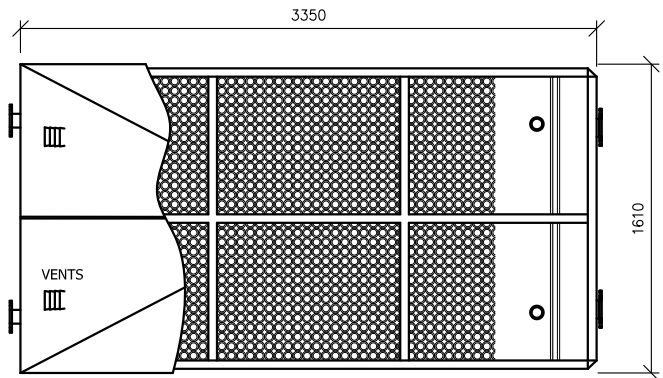

VTC FILTER PACK SPECIFICATION

TUBE:	55 mm Dia.
BLOCK SIZE x 15:	550x500x550mm
VOLUME:	2.3 m³
SURFACE AREA:	400 m²

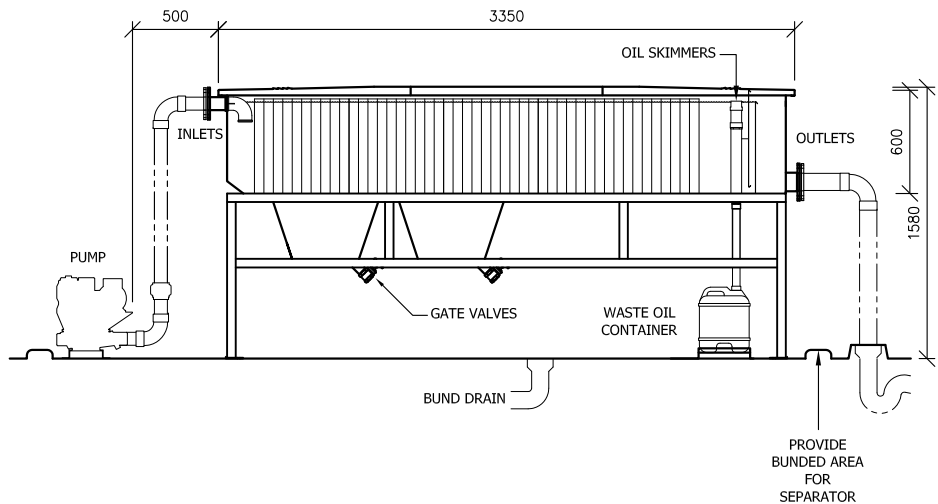

This is a schematic representation only. Slab size and gradient to engineers details as arranged by customer. All plumbing and electrical connections to be installed by certified tradesmen in accordance with relative authorities requirements. Tradesmen to be engaged by the purchaser. System to be approved by relative Local Authorities before Installation.

This Drawing and design is the Property of Fox Environmental Systems Pty Ltd. It must not be used for any other purpose than that for which it was issued.

Project	SYSTEM SPECIFICATION
Drawing Title	FX30,000SS SPECIFICATION
Drawn by:	M.J.H.H
Date:	12-12-2024
Scale:	
Drawing No:	10012.3 - SPEC